




LOAD 100%
NO DEGRADING


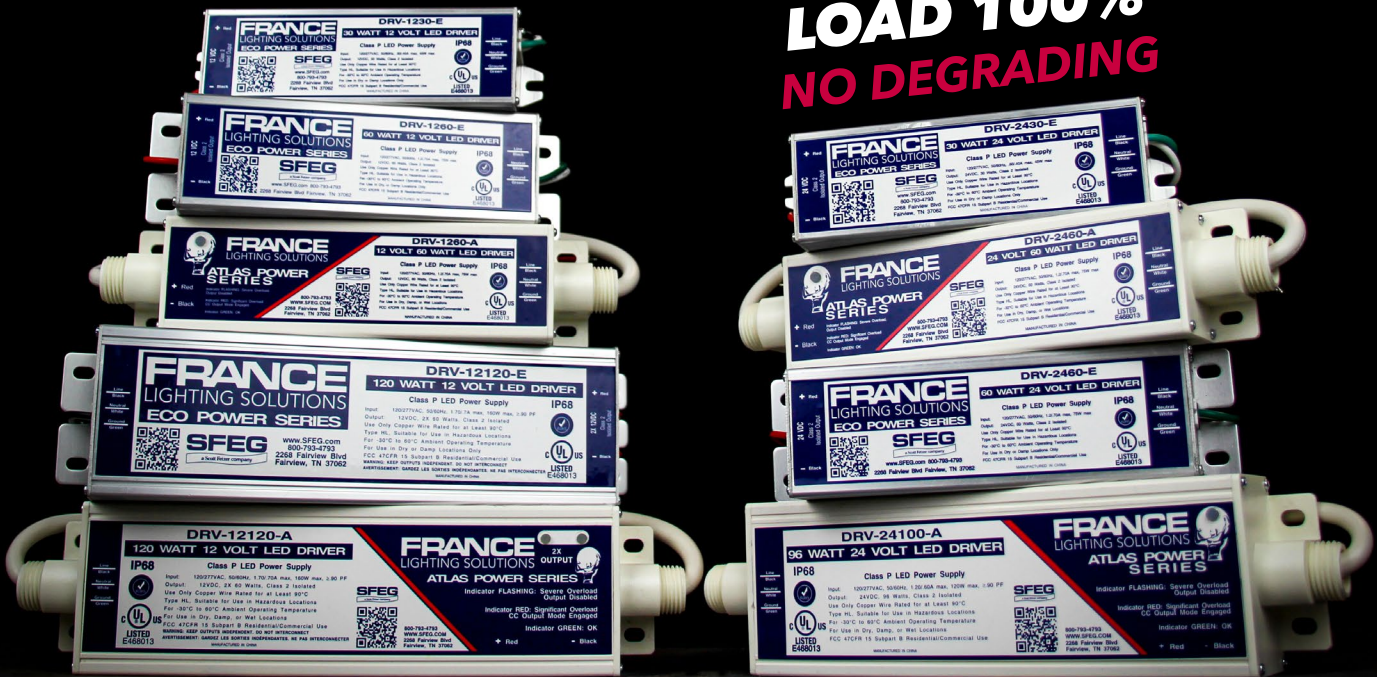


MOST RELIABLE POWER SUPPLY IN THE SIGN INDUSTRY

LOWER SYSTEM COST
LOAD MORE MODULES
PER POWER SUPPLY

TRUMATCH WARRANTY
7P / 7L WITH FRANCE LEDs
5P / 5L WITH 3RD PARTY LEDs

FRANCE TORTURE TEST
EACH MODEL IS RUN AT FULL
LOAD FOR 90 DAYS @ 185°F



CONTACT US OR ASK YOUR DISTRIBUTOR FOR MORE INFORMATION



FranceLEDProducts.com
2268 Fairview Blvd.
Fairview, TN 37062
sales@sfg.com
800.793.4793

YOUR NATIONAL DISTRIBUTOR





Cre8tive Sign Solutions
www.Cre8tiveSignSolutions.com
sales@Cre8tiveSignSolutions.com
937.552.7001



DRV-2430-E

PRO-LEVEL PERFORMANCE AT AN ENTRY LEVEL VALUE




France TruPower Power Supplies are built with integrated technology to produce the best power supply in the sign industry. Our **TruBuild** method protects your LED lighting source by controlling current, voltage and heat through tight circuitry integration. The result is a power supply that provides **TruLoads**, **TruVoltage**, **TruCurrent**, and **TruCooling**. For more details on each of these features and more click this link: [Product Series Comparison Chart](#).

MODEL #	OUTPUT	INPUT	OPERATING TEMPERATURE	UL LISTINGS	INSTALL ENVIRONMENT	WIRE LEADS	WEIGHT EACH	PACKAGING
DRV-2430-E	24VDC, 30 Watt 1.25 Amp, Class 2 No Min. Loading Required	120/277VAC 50/60Hz .80 / .40 Amp Max	-30°C to 60°C -22°F to 140°F	CLASS 2 CLASS P	DRY & DAMP	10"	1 lbs.	30 / CARTON

IDEAL FOR ENCLOSED APPLICATIONS

- CHANNEL LETTERS
- RACEWAYS / CABINETS
- FRANCE FAST PAKS, ETC.

**LOAD 100%
NO DEGRADING**

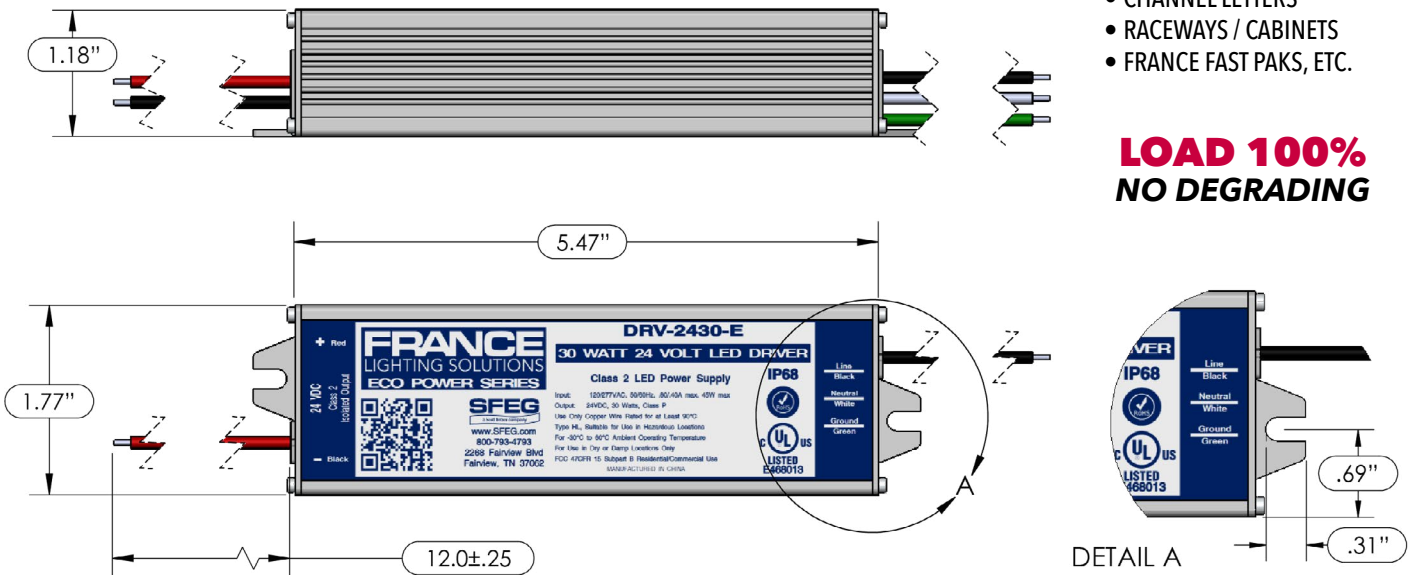

FRANCE TRUPOWER POWER SUPPLIES NAVIGATION

- E - 12v / 30w | E - 12v / 60w | E - 12v / 120w | A - 12v / 60w | A - 12v / 120w
 E - 24v / 30w | E - 24v / 60w | E - 24v / 100w | A - 24v / 60w | A - 24v / 100w




E {ECONO} SERIES - 60W



DRV-2460-E

PRO-LEVEL PERFORMANCE AT AN ENTRY LEVEL VALUE



France TruPower Power Supplies are built with integrated technology to produce the best power supply in the sign industry. Our TruBuild method protects your LED lighting source by controlling current, voltage and heat through tight circuitry integration. The result is a power supply that provides TruLoads, TruVoltage, TruCurrent, and TruCooling. For more details on each of these features and more click this link: [Product Series Comparison Chart](#).



MODEL #	OUTPUT	INPUT	OPERATING TEMPERATURE	UL LISTINGS	INSTALL ENVIRONMENT	WIRE LEADS	WEIGHT EACH	PACKAGING
DRV-2460-E	24VDC, 60 Watt 2.5 Amp, Class 2 No Min. Loading Required	120/277VAC 50/60Hz 1.2 / .70 Amp Max	-30°C to 60°C -22°F to 140°F	CLASS 2 CLASS P	DRY & DAMP	10"	2 lbs.	20 / CARTON



IDEAL FOR ENCLOSED APPLICATIONS

- CHANNEL LETTERS
- RACEWAYS / CABINETS
- FRANCE FAST PAKS, ETC.

**LOAD 100%
NO DEGRADING**

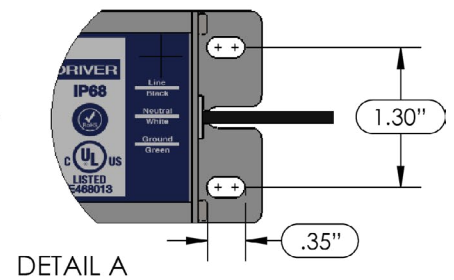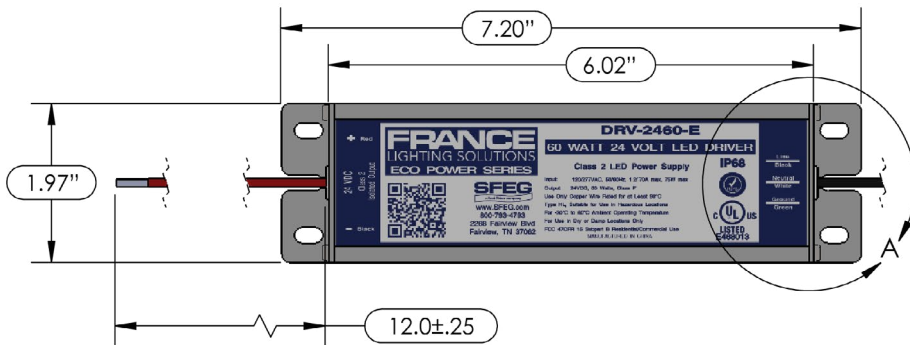

FRANCE TRUPOWER POWER SUPPLIES NAVIGATION



- E - 12v / 30w | E - 12v / 60w | E - 12v / 120w | A - 12v / 60w | A - 12v / 120w
- E - 24v / 30w | E - 24v / 60w | E - 24v / 100w | A - 24v / 60w | A - 24v / 100w

FranceLEDProducts.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062




E {ECONO} SERIES - 100W



DRV-24100-E

PRO-LEVEL PERFORMANCE AT AN ENTRY LEVEL VALUE




France TruPower Power Supplies are built with integrated technology to produce the best power supply in the sign industry. Our **TruBuild** method protects your LED lighting source by controlling current, voltage and heat through tight circuitry integration. The result is a power supply that provides **TruLoads**, **TruVoltage**, **TruCurrent**, and **TruCooling**. For more details on each of these features and more click this link: [Product Series Comparison Chart](#).

MODEL #	OUTPUT	INPUT	OPERATING TEMPERATURE	UL LISTINGS	INSTALL ENVIRONMENT	WIRE LEADS	WEIGHT EACH	PACKAGING
DRV-12100-E	24VDC, 96 Watt 4 Amp, Class 2 No Min. Loading Required	120/277VAC 50/60Hz 1.20 / .60 Amp Max	-30°C to 60°C -22°F to 140°F	CLASS 2 CLASS P	DRY & DAMP	10"	2.5 lbs.	10 / CARTON

IDEAL FOR ENCLOSED APPLICATIONS

- CHANNEL LETTERS
- RACEWAYS / CABINETS
- FRANCE FAST PAKS, ETC.

**LOAD 100%
NO DEGRADING**

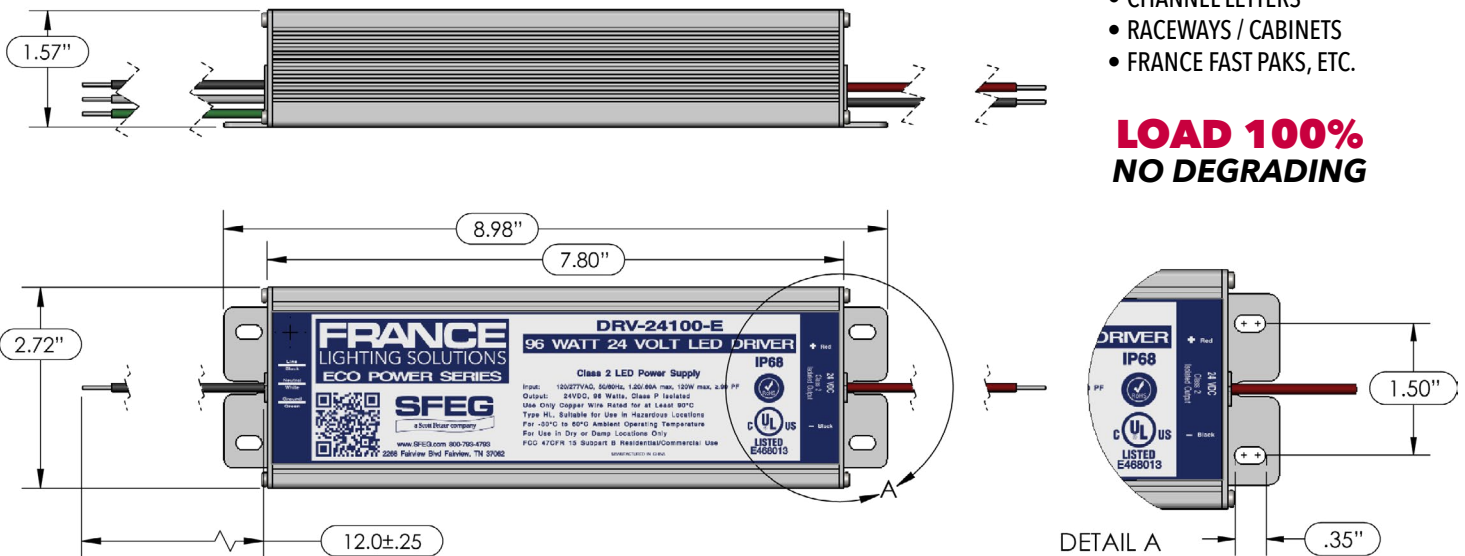

FRANCE TRUPOWER POWER SUPPLIES NAVIGATION

- E - 12v / 30w | E - 12v / 60w | E - 12v / 120w | A - 12v / 60w | A - 12v / 120w
- E - 24v / 30w | E - 24v / 60w | E - 24v / 100w | A - 24v / 60w | A - 24v / 100w



FranceLEDProducts.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062


A {ATLAS} SERIES - 60W



DRV-2460-A



BUILT TO WEATHER THE MOST CHALLENGING INSTALLS




France TruPower Power Supplies are built with integrated technology to produce the best power supply in the sign industry. Our TruBuild method protects your LED lighting source by controlling current, voltage and heat through tight circuitry integration. The result is a power supply that provides TruLoads, TruVoltage, TruCurrent, and TruCooling. For more details on each of these features and more click this link: [Product Series Comparison Chart](#).

MODEL #	OUTPUT	INPUT	OPERATING TEMPERATURE	UL LISTINGS	INSTALL ENVIRONMENT	WIRE LEADS	WEIGHT EACH	PACKAGING
DRV-2460-A	24VDC, 60 Watt 2.5 Amp, Class 2 No Min. Loading Required	120/277VAC 50/60Hz 1.2 / .70 Amp Max	-30°C to 60°C -22°F to 140°F	CLASS 2 CLASS P	WET, DRY & DAMP	10"	2 lbs.	20 / CARTON

IDEAL FOR EXPOSED & WET APPLICATIONS

- LED BORDER TUBE / ACCENTS
- OPEN FACE CHANNEL LETTERS
- CAR WASHES, FOUNTAINS, ETC.

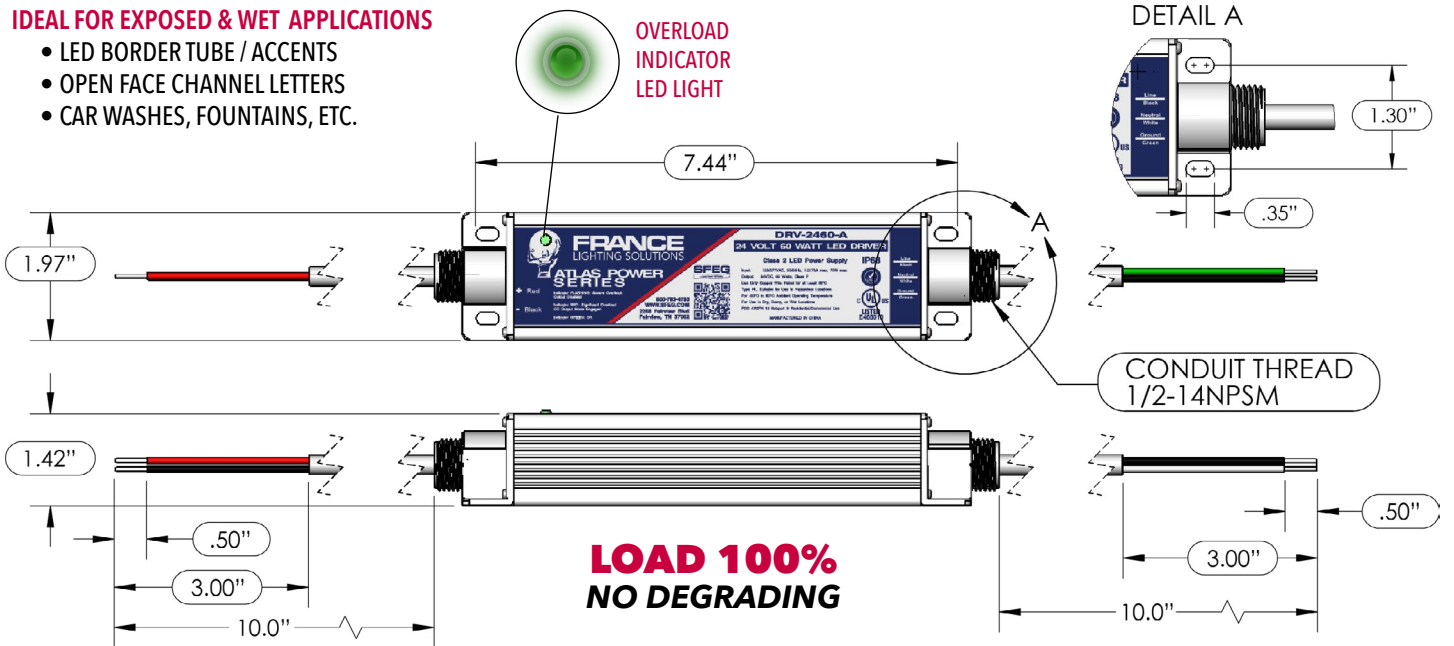

FRANCE TRUPOWER POWER SUPPLIES NAVIGATION



- E - 12v / 30w | E - 12v / 60w | E - 12v / 120w | A - 12v / 60w | A - 12v / 120w
 E - 24v / 30w | E - 24v / 60w | E - 24v / 100w | A - 24v / 60w | A - 24v / 100w

FranceLEDProducts.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062

A {ATLAS} SERIES - 100W





DRV-24100-A



120-277 VAC



BUILT TO WEATHER THE MOST CHALLENGING INSTALLS




France TruPower Power Supplies are built with integrated technology to produce the best power supply in the sign industry. Our TruBuild method protects your LED lighting source by controlling current, voltage and heat through tight circuitry integration. The result is a power supply that provides TruLoads, TruVoltage, TruCurrent, and TruCooling. For more details on each of these features and more click this link: [Product Series Comparison Chart](#).

MODEL #	OUTPUT	INPUT	OPERATING TEMPERATURE	UL LISTINGS	INSTALL ENVIRONMENT	WIRE LEADS	WEIGHT EACH	PACKAGING
DRV-24100-A	24VDC, 96 Watt 4 Amp, Class 2 No Min. Loading Required	120/277VAC 50/60Hz 1.2 / .60 Amp Max	-30°C to 60°C -22°F to 140°F	CLASS 2 CLASS P	WET, DRY & DAMP	10"	2 lbs.	10 / CARTON

IDEAL FOR EXPOSED & WET APPLICATIONS

- LED BORDER TUBE / ACCENTS
- OPEN FACE CHANNEL LETTERS
- CAR WASHES, FOUNTAINS, ETC.

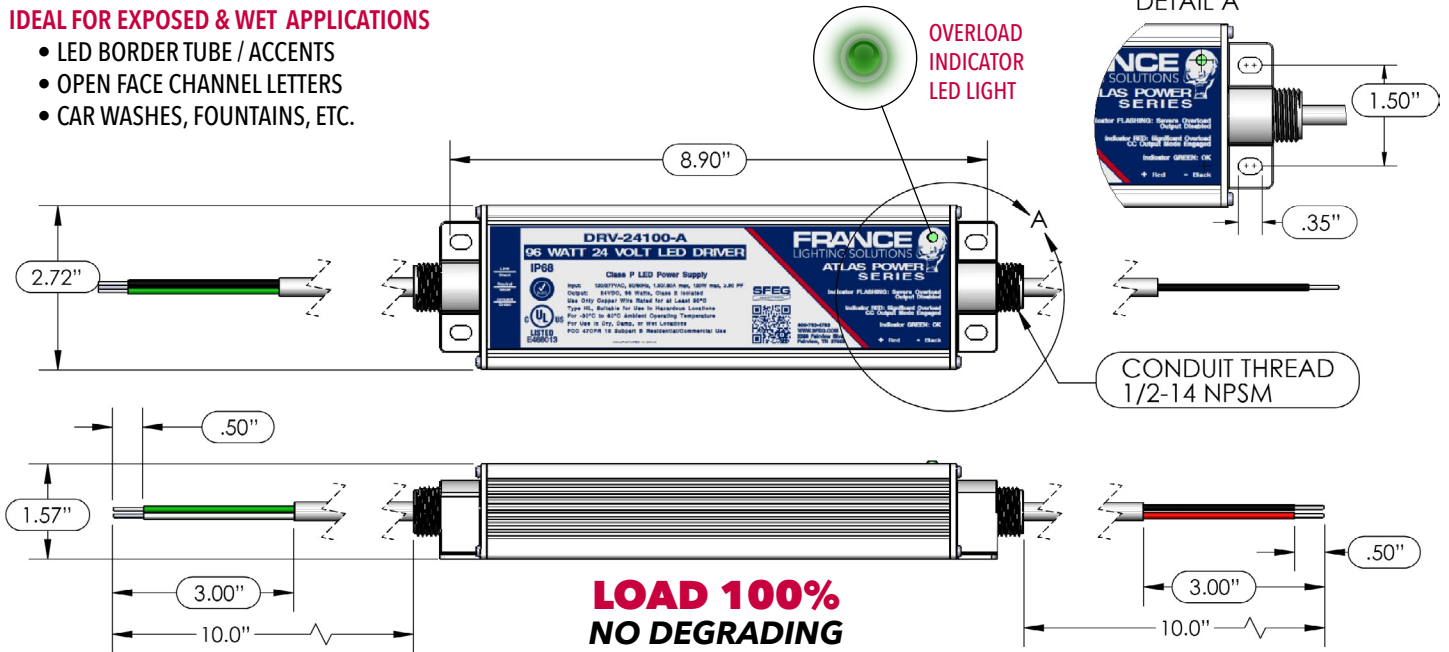

FRANCE TRUPOWER POWER SUPPLIES NAVIGATION

- E - 12v / 30w | E - 12v / 60w | E - 12v / 120w | A - 12v / 60w | A - 12v / 120w
- E - 24v / 30w | E - 24v / 60w | E - 24v / 100w | A - 24v / 60w | A - 24v / 100w



FranceLEDProducts.com - 800.793.4793 - 2268 Fairview Blvd., Fairview, TN 37062



FRANCE TRUPOWER - UTILITY POWER SUPPLIES

DRV-1260-U | DRV-1260-D | DRV-24100-D




PART #	MODEL	OUTPUT	INPUT	OPERATING TEMPERATURE	UL LISTINGS	INSTALL ENVIRONMENT	WIRE LEADS	WEIGHT EACH	PACKAGING
20704	DRV-1260-U	12VDC, 60 Watt Class 2, Class P No Min. Loading Required Maximum Load 85%	120-277VAC 50/60Hz 1.2 / .70 Amp Max	-40°C to 55°C -40°F to 131°F	CLASS 2 CLASS P	DRY / DAMP	12"	0.99 lbs.	10 / CARTON
20705	DRV-1260-D	Dimmable, 12VDC, 60 Watt Class 2, Class P No Min. Loading Required Maximum Load 85%	120-277VAC 50/60Hz .60 Amp Max	-40°C to 55°C -40°F to 131°F	CLASS 2 CLASS P	DRY / DAMP	12"	0.88 lbs.	20 / CARTON
20706	DRV-24100-D	Dimmable, 24VDC, 100 Watt Class 2, Class P No Min. Loading Required Maximum Load 85%	120-277VAC 50/60Hz .95 Amp Max	-40°C to 55°C -40°F to 131°F	CLASS 2 CLASS P	DRY / DAMP	12"	1.29 lbs.	10 / CARTON


NOTE: Dimmable power supplies are dimmed using a 0-10vdc power source.

IDEAL FOR ENCLOSED APPLICATIONS

- CHANNEL LETTERS (SPACE IS LIMITED/ OR DIMMABLE IS NEEDED)
- RACEWAYS / CABINETS (SPACE IS LIMITED/ OR DIMMABLE IS NEEDED)

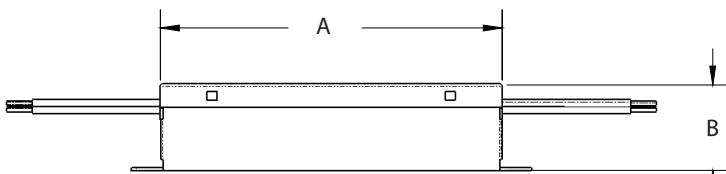

LOAD 85%
0-10 Dimming

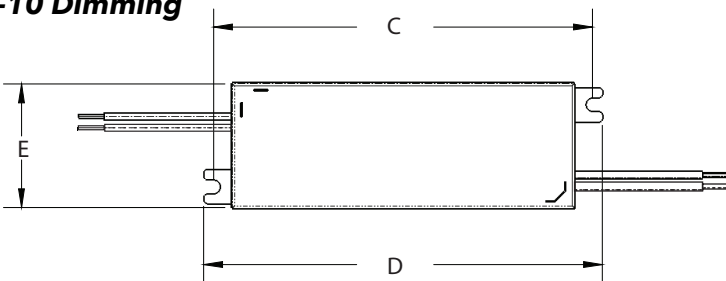

DIMENSIONS	20704	20705	20706
A (Length in.)	4.72	5.12	8.38
B (Height in.)	1.18	1.00	1.00
C (Length in.)	5.24	5.68	9.00
D (Length in.)	5.50	5.83	9.50
E (Width in.)	1.69	1.80	1.69



NOTE: Mounting varies according to model. See full specsheet.

Contact France Customer Service at 800.793.4793
2268 Fairview Blvd., Fairview, TN 37062